

RUNWAY



**Specially designed for
All Terrain application**



ENDURO A/T



All Terrain



Symmetrical




All Season

☉ Rim range: **15-18**

🌀 Aspect Ratio: **65-85**

⌚ Speed rating: **S-T**

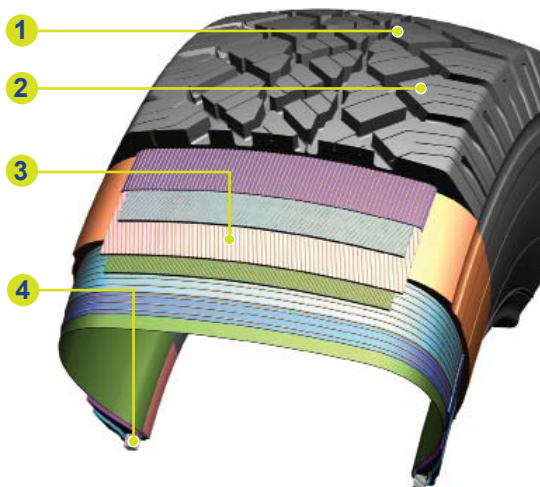

	Features	Benefits
1	Special block tread design with multiple sipes	▶ Optimum off road traction
2	Open shoulder grooves and wide lugs	▶ Superior all surface traction for all weather conditions
3	Full nylon cap ply	▶ Improves stability and handling
4	High-tension bead	▶ Excellent load bearing support, steering and cornering

* See warranty brochure for details



ENDURO A/T

Size Range

AR	Tire Size	LI	SR	UTQG /LR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Side Wall
							lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm	
65	P275/65R18	114	T	400AB	8J	7 1/2J;8 1/2J;9J;9 1/2J	2601	1180	44	300	13	10.2	32.0	815	11	279	OWL
	P275/70R16	114	T	400AB	8J	7 1/2J;8 1/2J	2601	1060	35	300	13	10.2	31.2	790	11	260	OWL
70	P255/70R17	110	S	400AB	7 1/2J	6 1/2J;7J;8J;8 1/2J	2337	1180	44	240	13	10.2	31.1	792	10	275	OWL
	LT31X10.50R15	109	S	C	8 1/2J	7 1/2J;8J;9J	2250	1021	51	350	16	12.6	30.7	781	11	268	OWL
75	LT235/75R15	104/101	S	C	6 1/2J	6JK;6J;7J	1985/1820	900/825	51	350	15	12.1	29.1	739	9	235	OWL
	LT245/75R16	120/116	S	E	7J	6 1/2K;6 1/2L;6 1/2J;7 1/2J	3042/2778	1380/1260	80	550	17	13.1	30.7	780	10	248	BSW
	LT265/75R16	112/109	S	C	7 1/2J	7K;7L;7J;8L;8J	3415/3085	1550/1400	80	550	17	13.5	31.7	804	10	265	OWL
	LT245/75R17	121/118	S	E	7J	6 1/2J;7J;7 1/2J	3195/2910	1450/1320	80/80	550/550	17	13.1	31.7	806	10	245	OWL
85	LT215/85R16	110/107	S	D	6J	5 1/2J;5 1/2K;6 1/2J;6 1/2L	2337/2149	1060/975	65	450	16	12.9	30.6	778	9	216	OWL
	LT235/85R16	120/116	S	E	6 1/2J	6J;6K;6L;6 1/2L;7J;7K;7L	3042/2778	1380/1260	80	550	17	13.1	31.7	806	9	235	BSW

LI Load Index SR Speed Rating OWL Outlined While Letter BSW Black Side Wall