

RUNWAY



GET A GRIP THIS WINTER

RWT-1



Comfort



Directional



Icy condition




Winter

⊗ Rim range: 13 - 17

⊙ Aspect Ratio: 50 - 80

⊕ Speed rating: T - H - V

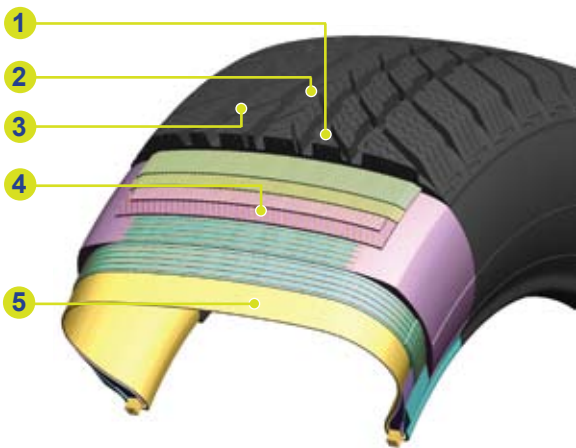

* See warranty brochure for details

Features

Benefits

1

Newest winter compound with enhanced sipes

▶ Excellent and improved grip on snow and ice

2

Circumferential grooves and zig zag center rib

▶ Provides better traction and stability on snow and ice

3

Variable pitch tread elements

▶ For a quiet and smooth ride

4

Dual steel belts for maximum road surface contact

▶ Increases handling stability

5

Equal Force Carcass construction

▶ Provides comfort and excellent steering response



RWT-1 Size Range

AR	Tire Size	LI	SR	Approved Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width	
						lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm
50	195/50R15	82	H	6J	5 1/2J;6 1/2J;7J	475	1047	35	240	11	8.8	22.7	577	7.9	201
	225/50R17	98	V	7J	6 1/2J;7 1/2J	750	1653	50	340	12	9.1	25.9	658	9.2	233
55	185/55R15	82	T	6J	6 1/2J;7 1/2J	475	1047	44	300	12	9.2	23.0	585	7.6	194
	195/55R15	89	T	6J	5 1/2J;6 1/2J	580	1279	49	340	12	9.3	23.4	595	7.9	201
	205/55R16	94	T	6 1/2J	6J;7J	670	1477	49	340	12	9.4	24.9	632	8.4	214
	205/55R16	94	H	6 1/2J	6J;7J	670	1477	49	340	12	9.4	24.9	632	8.4	214
60	215/55R16	97	T	7J	6 1/2J;7 1/2J	730	1609	50	340	12	9.5	25.3	642	8.9	226
	185/60R14	82	T	5 1/2J	5J;6J	475	1047	35	240	12	9.5	22.8	578	7.4	189
	195/60R14	86	T	6J	5 1/2J; 6 1/2J;7J	530	1168	35	240	12	9.5	23.2	590	7.9	201
	185/60R15	88	T	5 1/2J	5J;6J	560	1235	49	340	12	9.5	23.7	603	7.4	189
	195/60R15	88	T	6J	5 1/2J;6 1/2J	560	1235	35	240	12	9.5	24.2	615	7.9	201
	205/60R15	91	H	6J	5 1/2J;6 1/2J	615	1356	35	240	12	9.7	24.7	627	8.2	209
	205/60R16	92	H	6J	5 1/2J;6 1/2J	630	1389	35	240	12	9.7	25.7	652	8.2	209
	215/60R16	95	T	6 1/2J	6J;7J	690	1521	44	300	13	9.8	26.1	664	8.7	221
65	225/60R16	98	T	6 1/2J	6J;7J;7 1/2J;8J	750	1653	35	240	13	9.9	26.6	676	9.0	228
	155/65R13	73	T	4 1/2J	4.50B;5.00B	365	805	44	300	11	8.9	20.9	532	6.2	157
	175/65R13	80	T	5J	5.00B;5.50B	450	992	44	300	12	9.5	22.0	558	7.0	177
	155/65R14	75	T	4 1/2J	4.50B;5J	387	853	35	240	11	8.9	22.0	558	6.2	157
	165/65R14	79	T	5J	5.00B;5 1/2J	437	963	35	240	12	9.0	22.4	570	6.7	170
	175/65R14	82	T	5J	5 1/2J;6J	475	1047	35	240	12	9.5	23.0	584	7.0	177
	185/65R14	86	T	5 1/2J	5J;6J	530	1168	35	240	12	9.5	23.5	596	7.4	189
	175/65R15	84	T	5J	5 1/2J;6J	500	1102	44	300	12	9.5	24.0	609	7.0	177
	185/65R15	88	T	5 1/2J	5J;6J	560	1235	35	240	12	9.5	24.4	621	7.4	189
	195/65R15	95	T	6J	5 1/2J;6 1/2J	690	1521	49	340	12	9.6	25.0	635	7.9	201
	205/65R15	94	H	6J	5 1/2J;6 1/2J	670	1477	35	240	12	9.7	25.5	647	8.2	209
	70	215/65R15	96	H	6 1/2J	6J;7J	710	1565	44	300	13	9.8	26.0	661	8.7
215/65R16		98	T	6 1/2J	6J;7J	750	1653	35	240	13	9.8	27.0	686	8.7	221
155/70R13		75	T	4.50B	4 1/2J;5.00B	387	853	35	240	12	9.0	23.0	584	6.2	157
165/70R13		79	T	5.00B	5J;5.50B	437	963	35	240	12	9.0	22.1	562	6.7	170
175/70R13		82	T	5.00B	5J;5.50B	475	1047	35	240	12	9.0	22.7	576	7.0	177
175/70R14		84	T	5J	5.00B;5 1/2J	500	1102	35	240	12	9.0	23.7	602	7.0	177
185/70R14		88	T	5 1/2J	4 1/2J;5J;6J	560	1235	35	240	12	9.2	24.3	616	7.4	189
195/70R14		91	T	6J	5J;5 1/2J; 6 1/2J	615	1356	35	240	12	9.5	24.8	630	7.9	201
75	205/70R15	96	T	6J	5 1/2J;6 1/2J	710	1565	35	240	13	9.9	26.3	669	8.2	209
	215/70R15	98	T	6 1/2J	6J;7J	750	1653	35	240	13	10.0	26.9	683	8.7	221
	185/75R14	89	T	5J	4 1/2J;5 1/2J	580	1279	35	240	12	9.4	25.0	634	7.2	184
	205/75R14	95	T	5 1/2J	5J;6J;6 1/2J;7J	690	1521	35	240	12	9.6	26.1	664	8.0	203
80	205/75R15	97	T	5 1/2J	5J;6J;6 1/2J;7J	730	1609	35	240	12	9.6	27.1	689	8.0	203
	145/80R13	75	T	4.00B	4J;4.50B	387	853	35	240	12	9.0	22.1	562	5.7	145
	155/80R13	79	T	4.50B	4.00B;4 1/2J;5.00B	437	963	35	240	12	9.0	22.8	578	6.2	157
	165/80R13	83	T	4.50B	4 1/2J;5.00B	487	1074	35	240	12	9.0	23.4	594	6.5	165

LI Load Index SR Speed Rating